


## shuttering boards

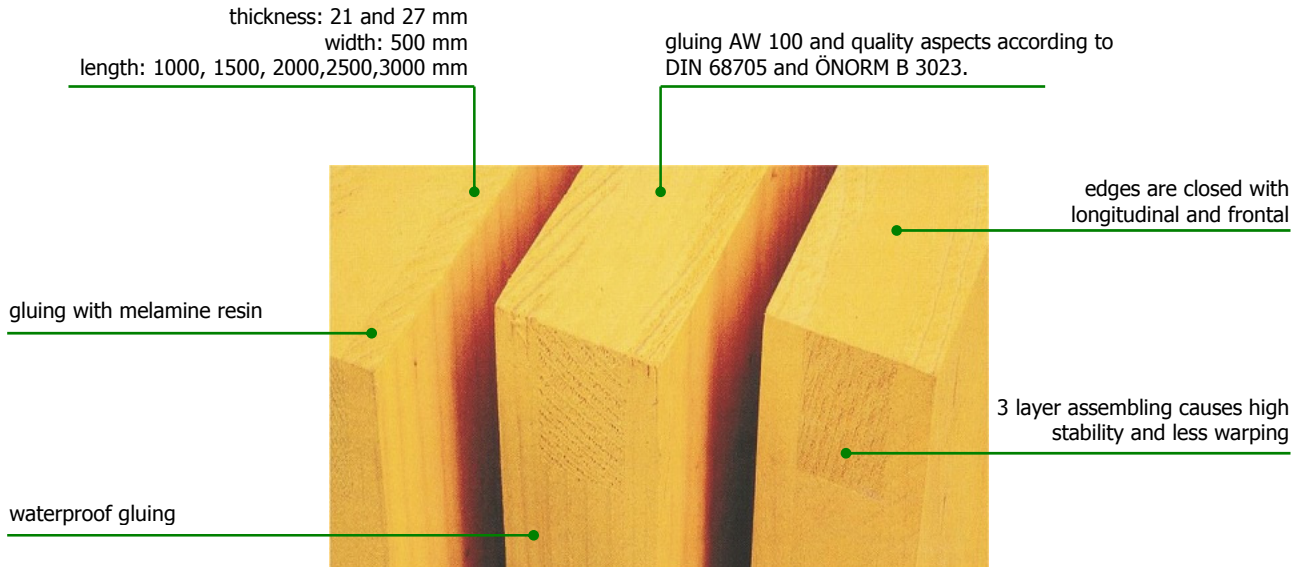

### arguments for LIP shuttering boards

#### experience and tradition:

decades of production and export experience (since 1961) of our engineered wood product

#### quality and characteristics:

99% is processed spruce from the adjacent regions. The surface of the boards is grinded (not only planed). 3 glued layers provide minimal deflection and dimensional stability and high bending strength.

Bei richtiger Instandhaltung und Wartung der Platten (reinigen, vor jedem Einsatz ölen) gewährleistet dieses hochwertige Produkt bis zu 20 Einsätze und ist daher pro Anwendung sehr kostengünstig.

#### maintenance and servicing:

Before the concrete is poured, the plates should always be moistened thoroughly with water. After the shuttering is recommended as soon as possible to clean the plates and stack them on a level surface and to dry the boards carefully. We recommend for the care of the plates, the use of paraffin oils and pastes (even before the first use), which may be applied according to the instructions of the manufacturer. To ensure maximum life, the panels cut as little as possible, also be nailed, screwed or drilled as less as practicable.

#### dimensions:

thickness: 27 and 21 mm

assembling: 2 outside layers with a thickness of 6.3 mm and one inside layer with a thickness of 14 mm.

widths: 500 und (200, 250, 300) mm

length: 1.00, 1.50, 2.00, 2.50, 3.00 m

#### service:

Through our stocks in Sachsenburg and Preding we can deliver even single packages, maybe in combination with other products of our group (sawn timber, planed timber, glulam, DUO, finger jointed structural timber, pellets, etc.).